

Plotted By:Springer, Jason B 10:21:57 AM 03/31/2017


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	01	CHNG'D PITCH FROM "BUN" TO "UNC" & THD DEPTH FROM "1.81" TO "1.88"; ADDED BALLOON #101; ADDED CALLOUTS FOR 12,13;14,6,18; RELOC CALLOUTS FOR ITEMS 6,7 (2.0,0CS);1 VIEW A-A WAS SECTION; A1 ADDED 5.38 DIM; RMV'D 1.12 DIM; BX 23.50 WAS 4X 23.50; ADDED 2.000" NPT TO BALLOON #8; ECN-PPT122765 KMD	12NOV12	JTC/TEB
	02	RMV'D 9.25,1.75,18.06,3.87,14.44 DIMS; ADDED CALLOUTS FOR 12,8;12 LOCS;,1,12 LOCS;,1,19; ADDED 31.56,105.93,3.56,18.31,9.75,13.50 DIMS; RMV'D CALLOUTS FOR;8;12LOCS;,1,19,12 LOCS;;8; RELOC 26.94; 104.31 WAS 116.75;; 105.88 WAS 119.50;; 135.94 WAS 40.30;; 15.94 WAS 7.12;; 17.28 WAS 12.74 27.27 WAS 33.87;; 29.07 WAS 35.07;; 3.25 WAS 4.94;; 1.25 WAS .74;; 10.44 WAS 19.88;; ADDED "OR ELECTRIC DRIVEN PRE-LUBE PUMP" TO CONN.#5 NOTE1 CHNG'D SIZE OF CONN #8 FROM 1.500" NPT TO 2.500"-250# FF FLANGE; ECN-PPT130480 KMD	27FEB13	JTC/TEB
	03	CONN. 5 NOTE WAS "1.500" OR 2.000" NPT. FRAME OIL INLET FROM COOLER OR ELECTRIC DRIVEN PRE-LUBE PUMP(PLUGGED)", ADD .300DE DIM. TO CONN. 5;11 CONN. 7 NOTE WAS "LEVELING SCREWS .875-9UNC-3B THD."; CONN. 10 NOTE WAS ".750NPT RTD - 5 HOLES IF REQUIRED"; CONN. NOTE 11 WAS ".750NPT - FRAME OIL LEVEL CONTROLLER - IF REQUIRED"; CONN. 17 NOTE; ADDED "SEE CYLINDER OUTLINE DWG."28.32 "WITH HANDPUMP" DIM; WAS 28.07; 17.71 "WITH HANDPUMP" DIM; WAS 17.29; ADD NOTES 1,2, HEATER REMOVAL CLEARANCE 59.56 DIM.,"REQUIRED CLEARANCE FOR REMOVAL OF HEATER (IF SUPPLIED" NOTE; R.58 PUMP CONN. DIM, ROTATION ARROW; REMOVED 27.62,13.62 JACKSCREW DIMS.; REVISED LUBRICATOR AND MOUNT. ECN-PPT130710 jtcoyle	10MAR14	JTCOYLE J.SPRINGER


1. HAND OIL PUMP (IF SUPPLIED)
2. FRAME OIL LEVEL INDICATOR
3. 1.000" NPT FRAME OIL DRAIN (PLUGGED)
4. FRAME OIL HEATER (IF REQUIRED)
5. 1.500NPT OR 2.000 SAE FLANGE FRAME OIL INLET FROM OIL COOLER/PO; CONSOLE (PLUGGED) SEE NOTE 1
6. 2.500" - 250# FF FLANGE FRAME OIL OUTLET TO COOLER (PLUGGED)
7. FOR LEVELING .875-9UNC-3B THD (SCREWS NOT SUPPLIED).
8. OIL PRESSURE REGULATION VALVE - FACTORY SET AT 60 PSIG
9. 1.250-7UNC-3B THD, 1.88 FULL THD - LIFTING LUG (1 PER THROW)
10. .750 NPT - MAIN BEARING RTD CONNECTION (PLUGGED WHEN RTD'S NOT REQUIRED).
11. .750 NPT - FRAME OIL LEVEL CONTROLLER CONNECTION (PLUGGED).
12. BICERA DOOR - IF REQUIRED BY CLIENT
13. 2.000" NPT - FRAME OIL FILLER
14. .125" NPT MAIN BRG HEADER OIL PRESS. CONN (CUSTOMER CONN)
15. 2.000" NPT - DRY-SUMP CONNECTION (PLUGGED)
16. .500" NPT - OIL DRAIN BACK (PLUGGED)
17. .750" NPT - PACKING RELATED CONNECTIONS 2 TOP / 2 BOTTOM EACH FRAME EXTENSION. SEE CYLINDER OUTLINE DRAWING
18. OIL FILTER
19. OIL FILTER DIFFERENTIAL PRESSURE INDICATOR (D-R Co. TO FURNISH)


NOTES:
1. IF OFF-MOUNTED FILTER IS USED IN CONJUNCTION WITH HAND OIL PUMP, HAND PUMP DISCHARGE MUST BE CONNECTED BEFORE OFF-MOUNTED FILTER INLET IN CLIENT PIPING, NOT AS SHOWN..
2. CRANKSHAFT ROTATION IS CCW WHEN VIEWED FROM PUMP END

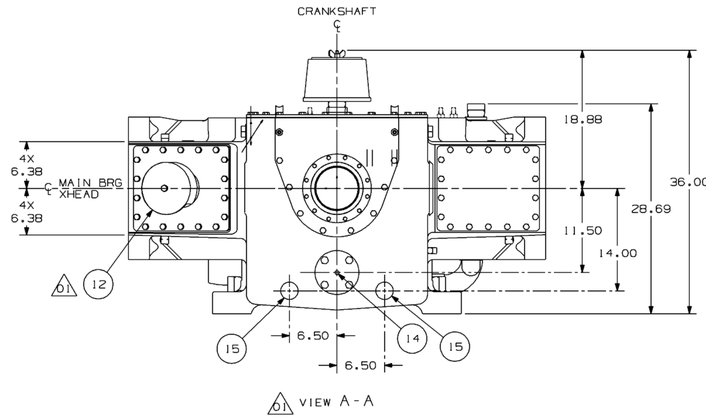

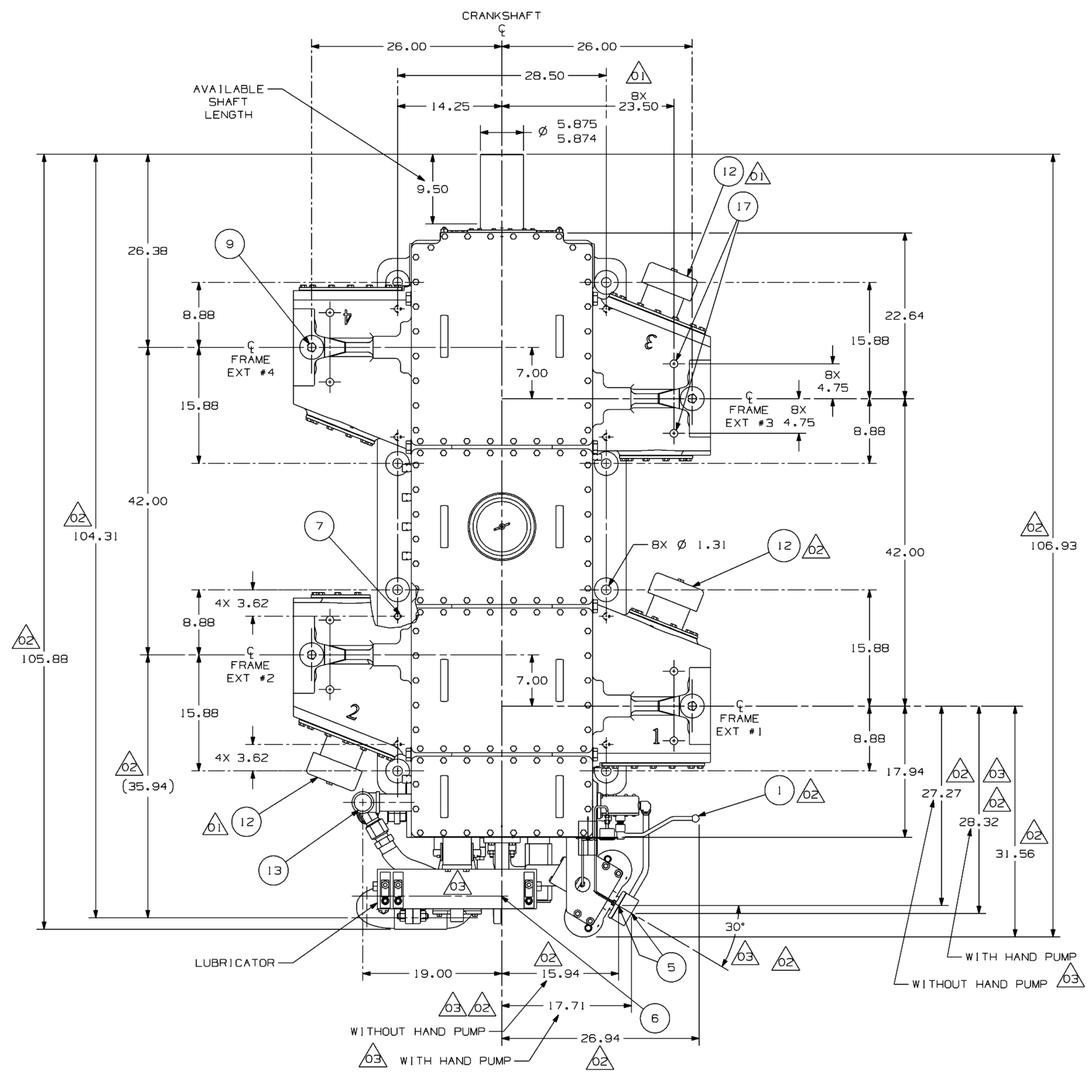

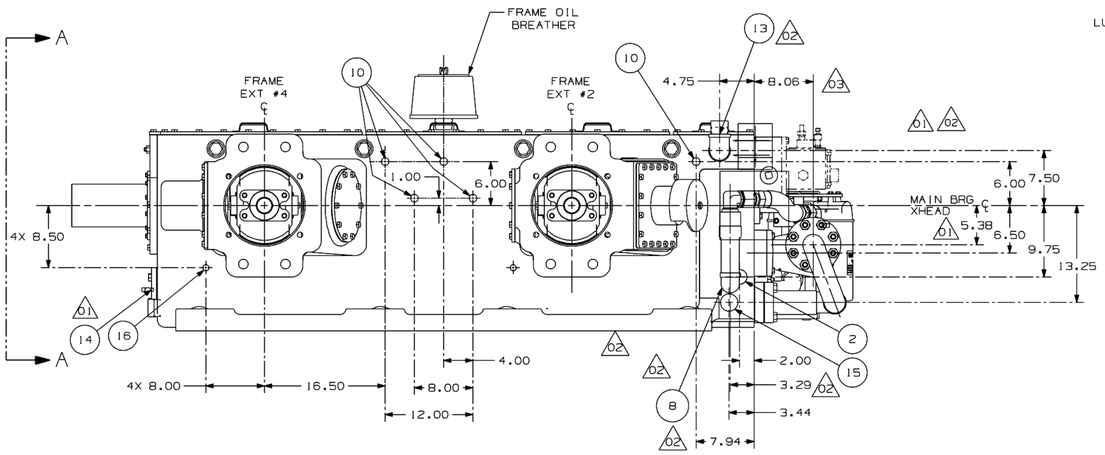

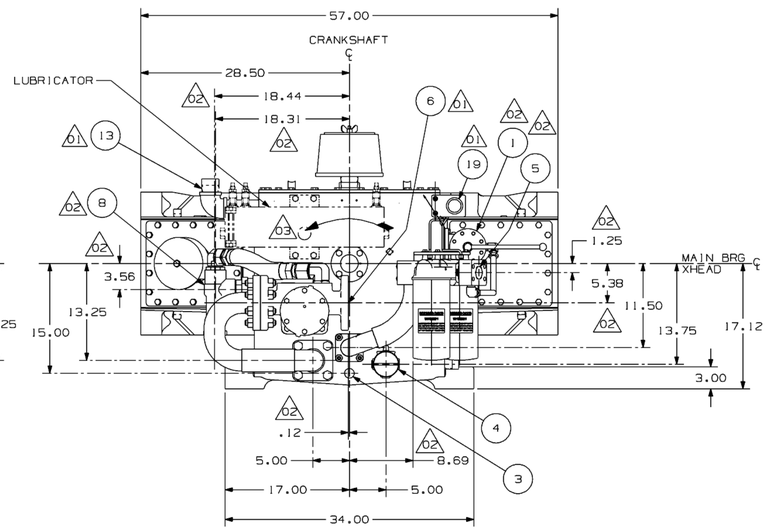

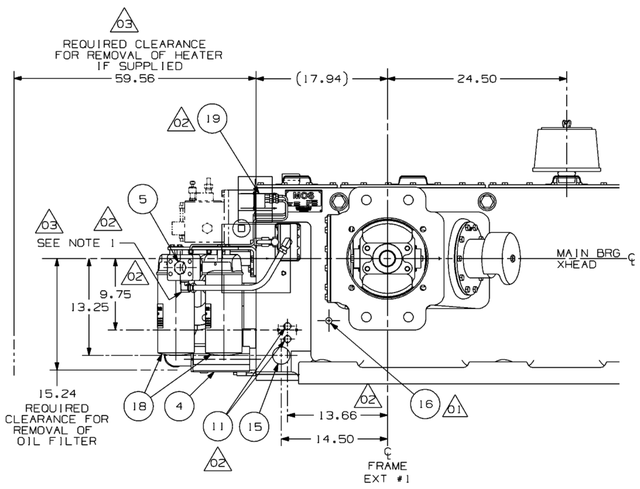

TOTAL APPROXIMATE WEIGHT: 9,000 LBS.

CHG TO: 149		PART NO.			
THIRD ANGLE PROJECTION		SIZE 45,000#	STROKE 5/6/7.0	TYPE MOS	
DRAWN K.DAVISON	DATE 26MAR12	NAME OF PART: OUTLINE - FRAME(4 THROW)			
CHECKED JT COYLE	DATE 26MAR12				
APPROVED T.BLAZEJEWSKI	DATE 26MAR12	SIZE E	FEDERAL SUPPLY CODE - - -	DWG NO. AA104001	REV. 03
		SCALE 1:8	WT. ABOVE	SHEET 1 OF 1	

DWG NO AA104001 SH 1